


LED T8 ECG




Features

- Energy saving with low power consumption
- Perfect retrofit traditional lamps with no change on dimensions
- Good color rendition, $R_a \geq 80$
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Direct retrofit for electronic ballast circuit
- Full glass body

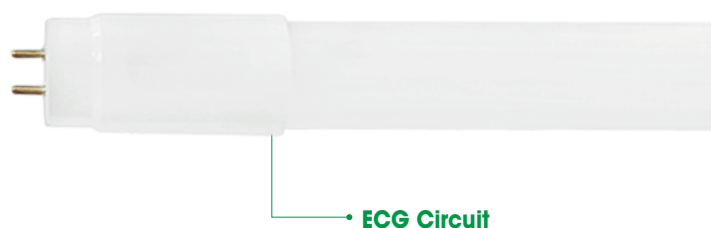


EU - TUBE



Model	Wattage	Color Temp	Beam Angle	Type	Length L1 / L2	Efficacy	Lumen	
LED F9T8/E/830/G/600	9W	3000K	280°	18W ECG	588mm / 602mm	127lm/W	1140lm	A+
LED F9T8/E/840/G/600	9W	4000K	280°	18W ECG	588mm / 602mm	130lm/W	1170lm	A+
LED F9T8/E/865/G/600	9W	6500K	280°	18W ECG	588mm / 602mm	133lm/W	1200lm	A+
LED F14T8/E/830/G/900	14W	3000K	280°	30W ECG	894mm / 906mm	125lm/W	1750lm	A+
LED F14T8/E/840/G/900	14W	4000K	280°	30W ECG	894mm / 906mm	129lm/W	1800lm	A+
LED F14T8/E/865/G/900	14W	6500K	280°	30W ECG	894mm / 906mm	132lm/W	1850lm	A+
LED F18T8/E/830/G/1200	18W	3000K	280°	36W ECG	1198mm / 1212mm	129lm/W	2330lm	A+
LED F18T8/E/840/G/1200	18W	4000K	280°	36W ECG	1198mm / 1212mm	133lm/W	2390lm	A+
LED F18T8/E/865/G/1200	18W	6500K	280°	36W ECG	1198mm / 1212mm	136lm/W	2450lm	A+
LED F24T8/E/830/G/1500	24W	3000K	280°	58W ECG	1500mm / 1513mm	127lm/W	3040lm	A+
LED F24T8/E/840/G/1500	24W	4000K	280°	58W ECG	1500mm / 1513mm	130lm/W	3120lm	A+
LED F24T8/E/865/G/1500	24W	6500K	280°	58W ECG	1500mm / 1513mm	133lm/W	3200lm	A+

Actual performance may vary depending on ballast output



* Comply to EN62776