



LED T8 Type A/B





Features

- Energy saving with low power consumption
- Perfect retrofit traditional lamps with no change on dimensions
- Good color rendition, $R_a \geq 80$
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Direct retrofit for magnetic ballast circuit
- Full glass body
- Voltage: 220-240Vac, 50/60Hz, Power Factor: 0.9
- High efficacy up to 140lm/W

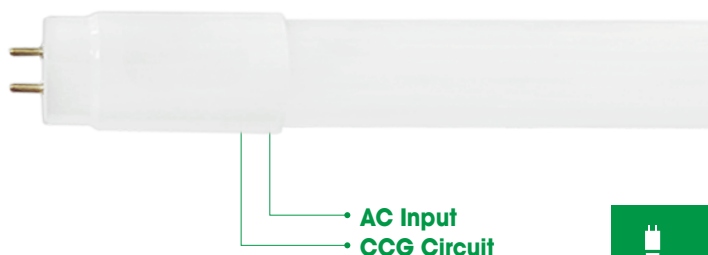

Model	Voltage	Wattage	Color Temp	Beam Angle	Type	Length L1 / L2	Efficacy	Lumen	
LED F10T8/830/G/600	220 - 240V	10W	3000K	280°	Type A / B	588mm / 602mm	87lm/W	870lm	A+
LED F10T8/840/G/600	220 - 240V	10W	4000K	280°	Type A / B	588mm / 602mm	93lm/W	930lm	A+
LED F10T8/865/G/600	220 - 240V	10W	6500K	280°	Type A / B	588mm / 602mm	100lm/W	1000lm	A+
LED F14T8/830/G/900	220 - 240V	14W	3000K	280°	Type A / B	894mm / 906mm	87lm/W	1220lm	A+
LED F14T8/840/G/900	220 - 240V	14W	4000K	280°	Type A / B	894mm / 906mm	94lm/W	1310lm	A+
LED F14T8/865/G/900	220 - 240V	14W	6500K	280°	Type A / B	894mm / 906mm	100lm/W	1400lm	A+
LED F20T8/830/G/1200	220 - 240V	20W	3000K	280°	Type A / B	1198mm / 1212mm	87lm/W	1740lm	A+
LED F20T8/840/G/1200	220 - 240V	20W	4000K	280°	Type A / B	1198mm / 1212mm	93lm/W	1860lm	A+
LED F20T8/865/G/1200	220 - 240V	20W	6500K	280°	Type A / B	1198mm / 1212mm	100lm/W	2000lm	A+
LED F24T8/830/G/1500	220 - 240V	24W	3000K	280°	Type A / B	1500mm / 1513mm	92lm/W	2200lm	A+
LED F24T8/840/G/1500	220 - 240V	24W	4000K	280°	Type A / B	1500mm / 1513mm	96lm/W	2300lm	A+
LED F24T8/865/G/1500	220 - 240V	24W	6500K	280°	Type A / B	1500mm / 1513mm	100lm/W	2400lm	A+
LED F30T8/830/G/1800	220 - 240V	30W	3000K	280°	Type A / B	1800mm / 1813mm	90lm/W	2700lm	A+
LED F30T8/840/G/1800	220 - 240V	30W	4000K	280°	Type A / B	1800mm / 1813mm	95lm/W	2850lm	A+
LED F30T8/865/G/1800	220 - 240V	30W	6500K	280°	Type A / B	1800mm / 1813mm	100lm/W	3000lm	A+

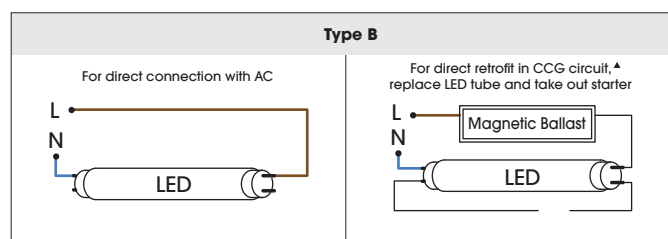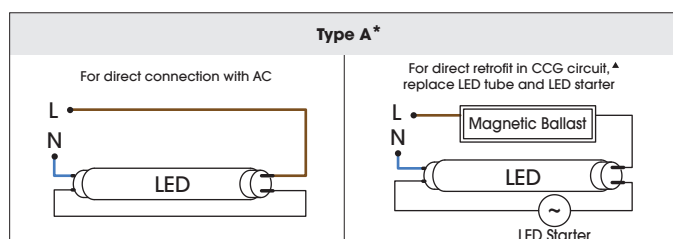

* Comply to EN62776

▲ Recommend to remove the parallel capacitor (if any) to achieve HPF