




Specification

- High efficiency LED chip
- Up to 150lm/W high efficiency
- Operating temperature: -20 - 50°C
- Can be installed in waterproof batten
- G5 lamp base
- Dimmable version also available

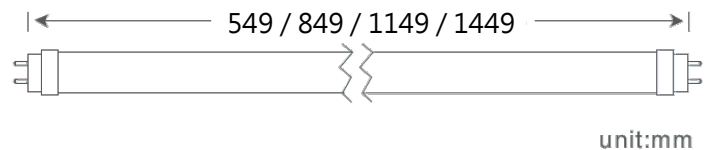

ZERO
Photobiological
Risk group
EN62471



Length	Model	Wattage	Lumen	CCT	CRI	PF	Input Voltage
2 feet	TA0610-T5	10W	1260lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V
3 feet	TA0914-T5	18W	2300lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V
4 feet	TA1216-T5	16W	2600lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V
4 feet	TA1218-T5	17W	2620lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V
4 feet	TA1226-T5	26W	3900lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V
5 feet	TA1521-T5	21W	2800lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V
5 feet	TA1526-T5	26W	3900lm	3000K/4000K/5000K/6000K	>80	>0.9	AC 85-265 V